

Mirror Trading Manager

© 1999-2025 ANTON NEL (formerly CODEWISE)



anton.nel.be@gmail.com



[@antonnell](https://t.me/antonnell)



www.antonnell.net/mirror



Signals Guide v5.2.x


(Last Date: 17 Feb 2025 ~ DRAFT)

BETA TESTING

Signal Provider

to

Signal Receivers

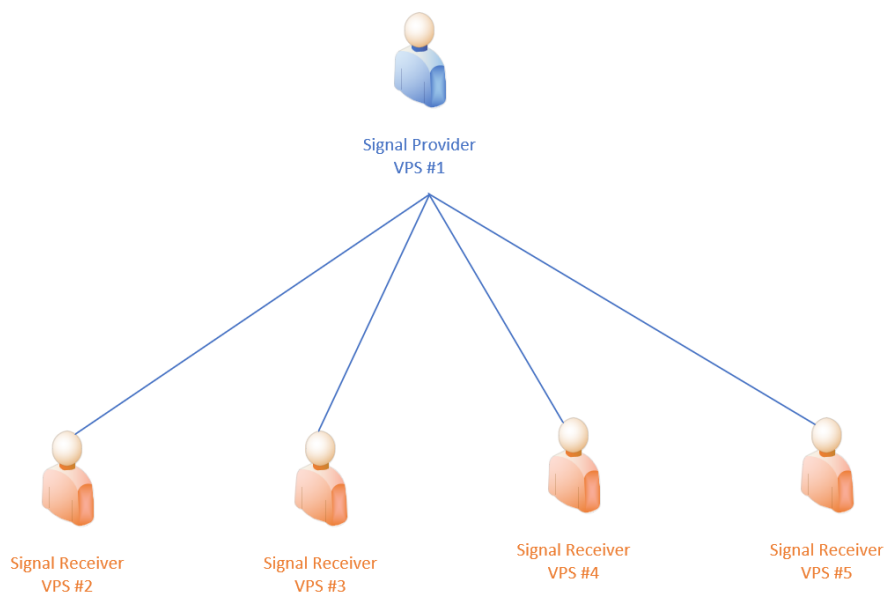

Overview

Signal:

- Login
- Heartbeat
- Echo
- Symbol Information
- Balance Information (option: Yes/No to send the signal)
- Live Data Feed (option: Yes/No to send the signal)
- New Order and Close Order (Modify Order not available at this stage)

Signal Provider sends the signal-to-Signal Receivers directly.

No Centralization / No 3rd Party involvement.

What is the advantage of using Signal services?

Signal Provider

- Don't need Proxy services.
- Master doesn't need to manage all the follower accounts. Just send the signal.

Signal Receiver

- Each follower account – own IP address
- Followers don't need to provide Master their trading account access.
- Followers need to install and config Mirror.
- Requires keeping the Mirror app running all the time.



First time setting up the firewall for Signal Provider

Step 1: Make sure Mirror App is installed and Open Mirror App (Run as administrator)

Step 2: Edit / Add Master Account

Make sure all the 3 steps are in green (1. Login Details, 2. Connection, 3. Subscribed Symbols)

Click **Signal Provider** Tab (see light-blue highlight)

You can edit "Signal Port Number" (default is 4189)

Click "Add port to Firewall" button

Edit "Name of Signal" – any name you like

Tick Activate / Enable Signal checkbox

See image below

Mirror Trading Manager - ACCOUNT: Master MT5|TEST MetaQuotes

ACCOUNT: MT5|TEST MetaQuotes

1 Login Details 2 Connection 3 Subscribed Symbols (9/9) 4 Symbols Mapped (5)

Login Settings News Symbols **Signal Provider** Snap Log

Activate / Enable Signal ☒ Name of Signal AntonSignBoss

Signal Port Number 4189 **Add Port to Firewall**

Send Data to all Receivers ☒ Balance and Equity ☐ Live Price Feed **Send Echo to all users**

Show Received Information in Log? ☒ Incoming Json Message ☒ Outgoing Json Message ☒ Login ☐ Heartbeat (every 30s)

Active	Approve	Username	Password	App	Ip Address	Ping	Last	Last Ping	Expiry Date	L/o	Edit	Del	Echo	Echo Last Message
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	power_user4	power_password4	1	83.134.25.214	22.56	2025-01-21 12:27:26	11s ago	2026-01-21					Hello tty5 2025-01-21 11:09:16



Setup Signal Receiver

Open Mirror App

Edit / Add Master Account

Master = Checked

Connector = Signal Receiver

Signal Provider Short Name = any name you like

Signal Provider Abbr = any abbr you like

Enter Signal Provider IP Address with port number (ask your provider for ip address with port, username and password so that they can approve)

ACCOUNT: SIGNALRECEIVER|AntonTest

1 Login Details

2 Connection

3 Subscribed Symbols (9/9)

4 Symbols Mapped (2)

Login

Settings

News

Symbols

Snap Log

Master

☒

Enable

☒

Auto Deactivate Login

☐

2024-12-21 08:00

Number/Group Name (max. 10 chars)

009

Trader Name (unique)*

AntonTest

Connector

Signal Receiver

☒ Show Outgoing Json Message in Log?

☒ Show Incoming Json Message in Log?

Signal Provider Short Name*

Anton

Signal Provider Abbr (max. 16 chars)*

ANTONSIGN

Virtual Balance and Equity

100000.00

Signal Provider IP Address

127.0.0.1:4189

Username for Signals

power_user4

Password for Signals

power_password4

Echo Message

Hello tty5

Send Message To Signal Provider

Auto Login At Start Up

☒

